

# IDEAL 4705 (TABLE TOP MODEL)

max.  
**70**  
mm

Powerful manual office guillotine with  
475 mm cutting length and 70 mm cutting height.


← **47 cm** →

Cutting length	475 mm
Cutting height	70 mm
Narrow cut	30 mm
Table depth	455 mm



optional stand

## Technical specifications




<b>Dimensions</b>	590 x 1000 x 890 mm (H x W x D) height with stand 1270 mm
<b>Weight</b>	85 kg table top model 93 kg with stand

## Product characteristics

SCS - the Safety Cutting System made by IDEAL provides numerous safety features: hinged, transparent safety guard on the front table (locks automatically while cutting); transparent safety cover on the rear table; safety catch (locks blade lever in upper position); safe and convenient blade change from the front without removing machine covers; blade changing device with covered cutting edge; blade depth adjustment from the outside of the machine; cutting stick can be turned or replaced easily from the outside of the machine. Blade made of German high quality steel. Solid steel blade carrier. Adjustable blade guides made of hardened steel. Solid spindle clamp with hand wheel. Spindle guided backgauge with hand crank. Measuring scale (mm/inches) on front table. Solid all-metal construction. Designed as table top machine, a stand is available as an option (at an extra cost).

# IDEAL 4705 (TABLE TOP MODEL)

## Features

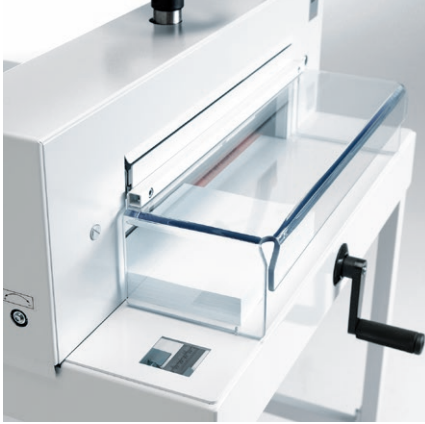

### TRANSPARENT SAFETY GUARD

A cut can only be executed, if the safety guard is closed and the safety catch for the blade lever is released.



### HAND CRANK

Convenient setting of the backgauge via a hand crank in combination with the measuring scale on the machine table. The precision backgauge spindle guarantees exact cuts.



### SPINDLE CLAMP WITH HAND WHEEL

The variable clamp pressure is applied via the hand wheel to both ends of the clamp for firm pressure across the entire cutting line.



### MEASURING SCALE

The precise measuring scale (mm / inches) located on the front table of this guillotine allows precise positioning of the backgauge.



### SAFE BLADE CHANGE

Safe and convenient blade change without removing covers. Blade changing device covers cutting edge of blade to protect the operator.



### CUTTING STICK CHANGE

Turning or exchanging the cutting stick can easily be managed from the outside of the guillotine without using any tools.



# IDEAL